

Electrical Hot Air Generator & Duct Heating Systems



Electrical Hot Air Generator & Duct Heating Systems

Flow Rate : 50 m³ / hr. to 25000 m³ / hr.

Temperature : 50⁰C to 500⁰C


Features :

Easy Operation
Low Maintenance
Long Life
Low Capital Cost
High Accuracy Temperature

Use :

- * Heating of the FRP resin
- * Anticake for plasticizer
- * Hopper drying sterilization
- * Drying after printing
- * Drying centrifugal
- * Heating and drying IC
- * Drying copper iron wire
- * Drying after varnish was dipped to the transformer
- * Drying after varnish was dipped to the transformer
- * Heating and drying gas canisters
- * Heating and drying inside iron vynal pipe
- * Drying of wheat nas red bean etc.
- * Heating of the bearing
- * drying absorbent
- * softening of the chocolate material
- * Contraction of the cap seal of shampoo and hair mousse etc.
- * Drying of sugar
- * Drying sky boots ice skates
- * Aging over of the semiconductor
- * Food process Industry
- * Crayo Tank/Vessel moisture removing
- * Paint Drying
- * Wind blade pre-heating
- * Die pre-heating
- * Welding Flux heating
- * Chemical Drum Heating
- * AHU Heating for Pharma Industry



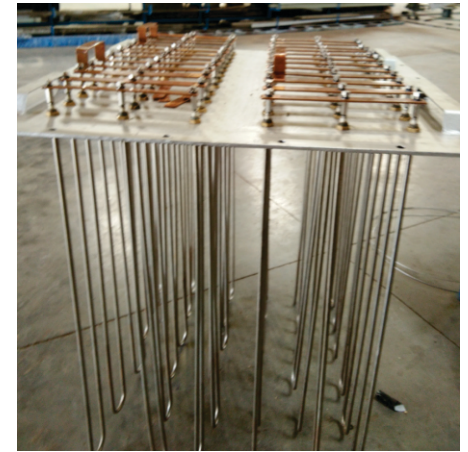

Hot Air Axial Flow | Hot Air Centrifugal Flow Hot Air Re-Generation Flow | Hot Air High Pressure Flow

